

# FT12-55G(12V55Ah)



## Specification





Cells Per Unit	6
Voltage Per Unit	12
Capacity	55Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 18.0 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 9.0 mΩ
Terminal	F11(M6)
Max. Discharge Current	550A (5 sec)
Design Life	15 years (floating charge)
Maximum Charging Current	11.0 A
Reference Capacity	C3 37.5AH C5 25.4AH C10 48.4AH C20 55.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.2 V~14.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 2% at 20°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



FTG (Deep Cycle GEL) series is pure GEL battery with 15 years floating design life, it is ideal for standby or frequent cyclic discharge applications under extreme environments. By using strong grids, high purity lead and patented Gel electrolyte, the FTG series offers excellent recovery capability after deep discharge under frequent cyclic discharge use, and can deliver 450 cycles at 100% DOD. Suitable for solar & wind system, CATV, marine, RV and deep discharge UPS, and telecommunication, etc.



## Dimensions



F11 Terminal

Length	291±2mm (11.5 inches)
Width	106±2mm (4.17 inches)
Height	230±2mm (9.06 inches)
Total Height	230±2mm (9.06 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	87.3	70.1	45.5	29.9	18.2	13.7	10.9	9.16	6.19	5.11	2.86
1.65V	82.5	67.0	43.7	28.8	17.7	13.3	10.6	8.92	6.12	5.04	2.82
1.70V	75.9	62.8	41.8	27.9	17.1	12.9	10.3	8.69	6.03	4.97	2.78
1.75V	69.5	58.4	39.9	26.9	16.5	12.5	10.1	8.47	5.94	4.90	2.75
1.80V	62.9	53.9	38.2	25.9	15.9	12.1	9.78	8.25	5.84	4.84	2.72
1.85V	51.4	44.7	32.9	23.2	14.6	11.2	9.09	7.69	5.48	4.56	2.58

### Constant Power Discharge Characteristics : WPC(25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	168.6	139.2	94.0	63.8	39.3	29.7	23.8	20.1	13.7	11.4	6.40
1.65V	160.4	133.8	91.0	62.0	38.2	29.0	23.3	19.6	13.6	11.3	6.32
1.70V	152.2	128.4	88.0	60.3	37.2	28.2	22.7	19.2	13.4	11.1	6.24
1.75V	141.8	121.2	85.0	58.5	36.0	27.5	22.2	18.8	13.3	11.0	6.18
1.80V	130.6	113.5	82.1	56.5	34.9	26.8	21.7	18.3	13.1	10.9	6.12
1.85V	108.7	95.5	71.4	51.0	32.2	24.9	20.2	17.2	12.3	10.2	5.82

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C<sub>20</sub> should reach 95% after the first cycle and 100% after the third cycle.


# FT12-55G(12V55Ah)




## Discharge Characteristics Curve

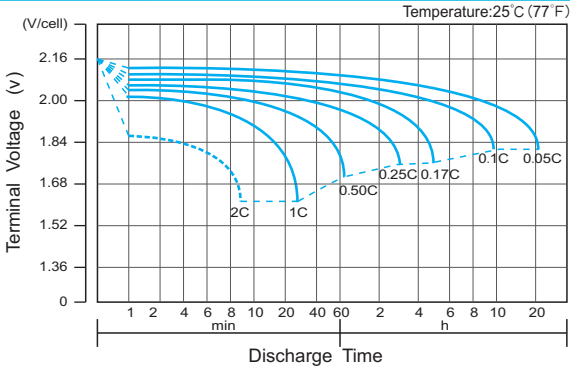


## Charge Characteristic Curve for Cycle Use(IU)

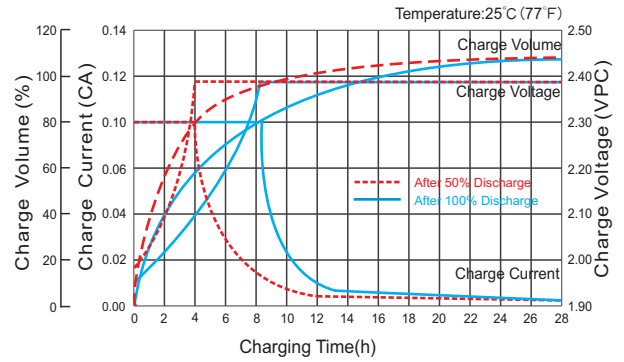


## Cycle Life in Relation to Depth of Discharge

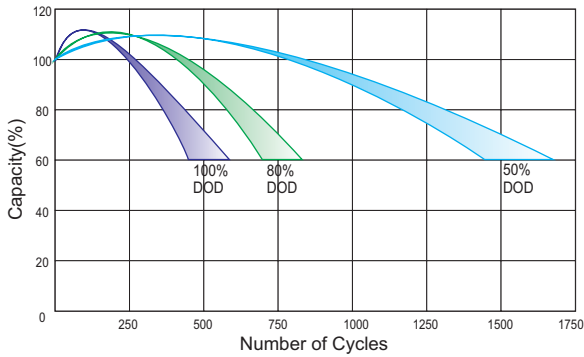


## Relationship Between Charging Voltage and Temperature

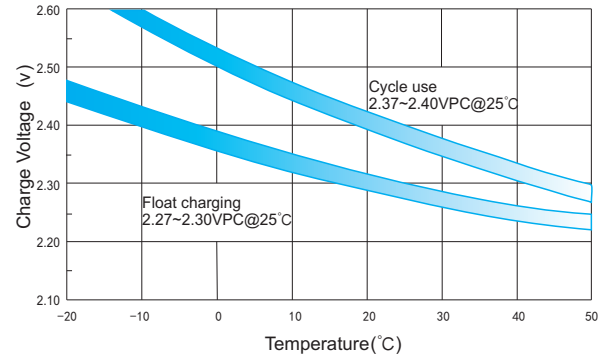


## Temperature Effects on Capacity

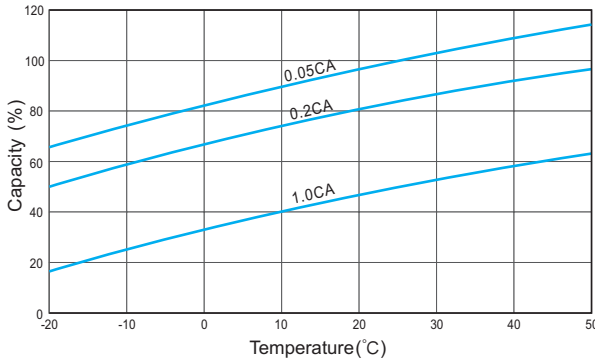


## Storage Characteristics

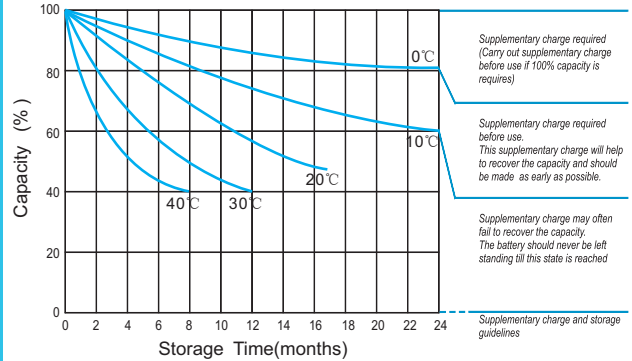

## Effect of Temperature on Long Term Life

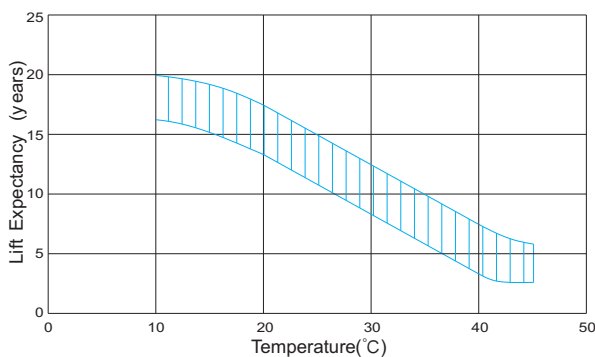

## Relationship of OCV And State of Charge(20°C)

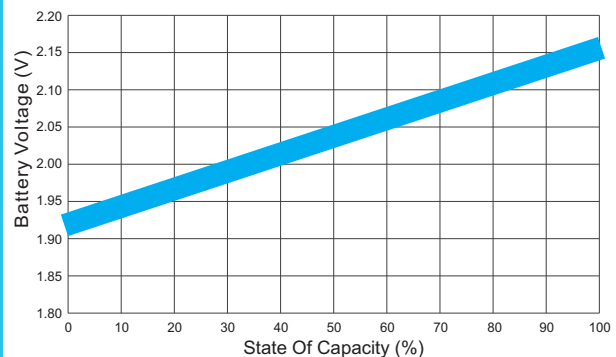

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.