



RA6-200(6V200Ah)

Specification

Cells Per Unit	3
Voltage Per Unit	6
Nominal Capacity	200Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 27.5 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 2.0 mΩ
Terminal	F14(M8)/F16(M8)
Max. Discharge Current	2000A (5 sec)
Short Circuit Current	3700A
Design Life	12 years (Float charging)
Max. Charging Current	60.0 A
Reference Capacity	C3 154.8AH C5 174.5AH C10 200.0AH C20 212.0AH
Standby Use Voltage	6.80 V~6.90 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.30 V~7.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RA series is a general purpose battery with 12 years design life in float service. It meets with IEC, JIS, BS, GB/T and YD/T standards. With advanced AGM valve regulated technology and high purity raw material, the RA series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



ISO 9001



ISO 14001



OHSAS 18001




MH 28539



G4M20206-0910-E-16

Dimensions

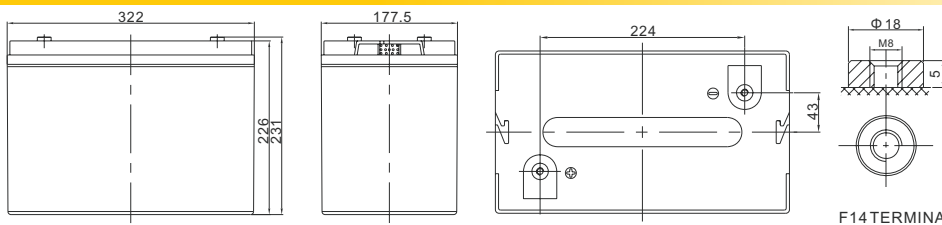

Length	322±2mm (12.7 inches)
Width	177.5±2mm (6.99 inches)
Height	226±2mm (8.90 inches)
Total Height	231±2mm (9.09 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

F14 TERMINAL

Unit:mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	439.3	352.3	216.8	122.2	72.8	56.4	44.3	37.7	25.4	21.1	11.0
1.65V	415.1	336.8	208.2	118.0	70.5	54.7	43.1	36.8	25.1	20.8	10.9
1.70V	382.2	315.4	199.0	114.2	68.2	53.2	42.0	35.8	24.7	20.5	10.7
1.75V	349.8	293.5	190.2	110.0	65.8	51.6	40.9	34.9	24.3	20.3	10.6
1.80V	316.7	271.0	181.8	105.8	63.4	50.0	39.7	34.0	23.9	20.0	10.5
1.85V	258.8	224.9	156.5	94.9	58.1	46.2	36.9	31.7	22.5	18.8	10.0

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	746.8	615.8	393.8	229.6	138.0	107.7	85.1	72.7	49.5	41.5	21.7
1.65V	719.3	597.5	382.1	223.0	134.2	104.9	83.1	71.1	49.1	41.0	21.4
1.70V	674.3	568.0	368.8	217.1	130.5	102.5	81.2	69.5	48.4	40.5	21.2
1.75V	628.4	536.2	356.2	210.5	126.5	99.8	79.4	68.0	47.8	40.0	21.0
1.80V	578.7	502.1	343.9	203.6	122.6	97.1	77.4	66.5	47.1	39.5	20.8
1.85V	481.4	422.6	299.1	183.7	113.0	90.2	72.2	62.2	44.4	37.3	19.7

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.

RA6-200(6V200Ah)




Discharge Characteristics Curve

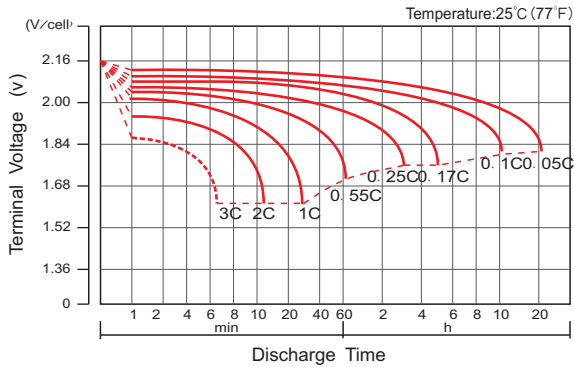

Charge Characteristic Curve For Standby Use



Cycle Life In Relation To Depth Of Discharge

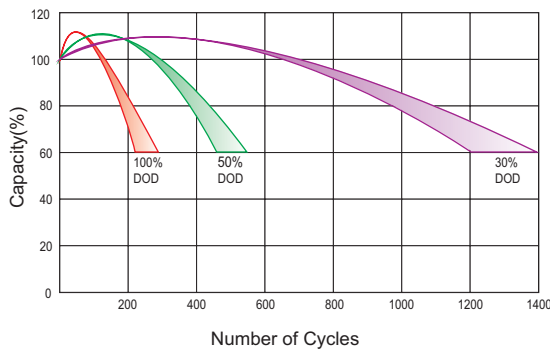

Relationship Between Charging Voltage And Temperature




Temperature Effects On Capacity



Storage Characteristics



Effect Of Temperature On Long Term Life

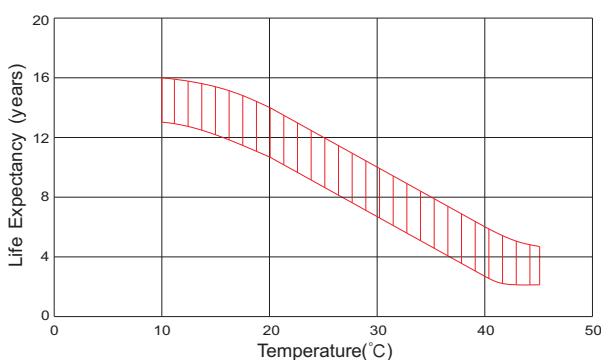

Life Characteristics Of Standby Use



(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.