



HR6-16W(6V16W)

Specification



HR (High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids, thick plate and specially designed active material. It is with lower I.R, lower self discharge rate, high power, and longer service life. The HR series battery offers 30% more power output than the standard series. It is suitable for high power standby used, such as datacenter, UPS, EPS etc.



ISO 9001

ISO 14001


OHSAS 18001



MH 28539

Cells Per Unit	3
Voltage Per Unit	6
Capacity	16W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 0.68 Kg (Tolerance ± 5.0%)
Internal Resistance	Approx. 24 mΩ
Terminal	F2
Max. Discharge Current	40A (5 sec)
Short Circuit Current	223A
Design Life	Could Reach 8 years
Max. Charging Current	1.2A
Reference Capacity	C10 3.7AH C20 4.0AH
Standby Use Voltage	6.8 V~6.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Equalization Voltage	7.3 V~7.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

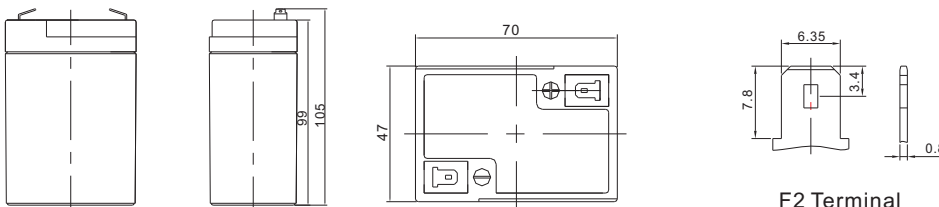

F2 Terminal

Length	70±1.5mm (2.76 inches)	
Width	47±1.5mm (1.85 inches)	
Height	99±1.5mm (3.90 inches)	
Total Height	105±1.5mm (4.13 inches)	
Terminal	Value	
M5	6~7	N*m
M6	8~10	N*m
M8	10~12	N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	20.86	18.34	14.65	12.56	9.267	7.284	5.189	2.910	2.063
1.67V	18.93	16.64	13.40	11.58	8.667	6.875	4.917	2.774	1.975
1.70V	18.12	15.92	12.87	11.16	8.400	6.691	4.796	2.713	1.938
1.75V	16.78	14.75	11.99	10.46	7.933	6.358	4.595	2.622	1.879
1.80V	15.37	13.51	11.08	9.754	7.533	6.058	4.395	2.524	1.813
1.85V	13.14	11.55	9.44	8.281	6.460	5.262	3.887	2.281	1.658

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	37.49	32.96	26.43	22.74	16.93	13.41	9.59	5.46	3.91
1.67V	34.45	30.28	24.49	21.26	16.00	12.80	9.23	5.25	3.77
1.70V	33.26	29.24	23.71	20.63	15.67	12.52	9.02	5.17	3.71
1.75V	31.11	27.35	22.33	19.58	14.93	12.05	8.73	5.02	3.62
1.80V	28.88	25.39	20.89	18.46	14.27	11.57	8.45	4.88	3.52
1.85V	25.10	22.06	18.05	15.86	12.40	10.14	7.52	4.44	3.23

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


HR6-16W(6V16W)




Discharge Characteristics Curve

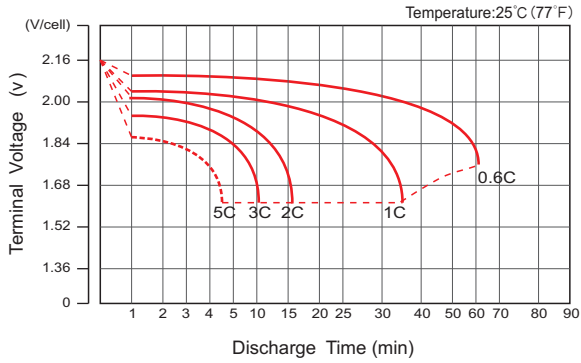


Charge Characteristic Curve For Standby Use

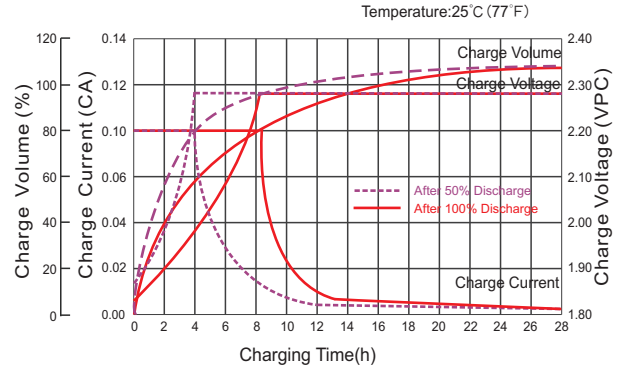


Storage Characteristics

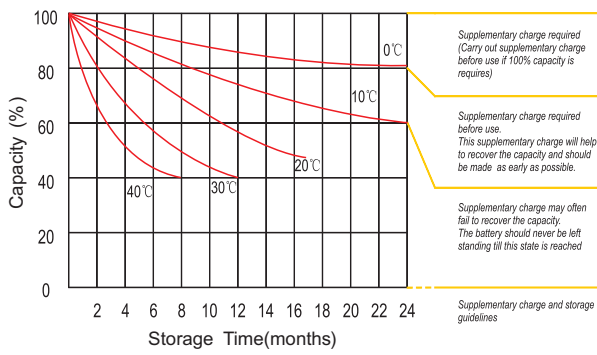


Relationship Between Charging Voltage And Temperature

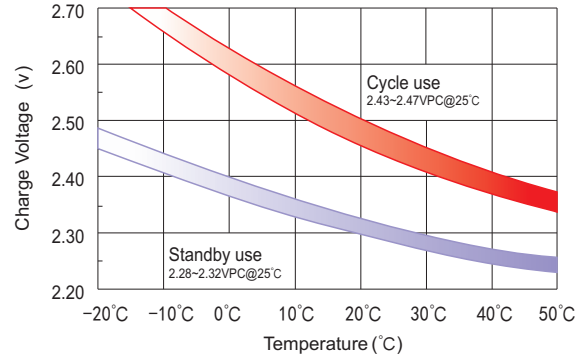


Temperature Effects On Capacity

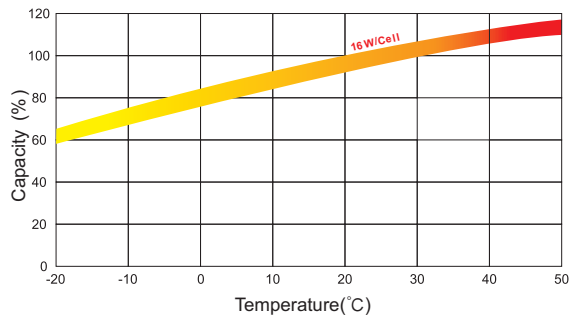


Relationship of OCV And State of Charge(20°C)

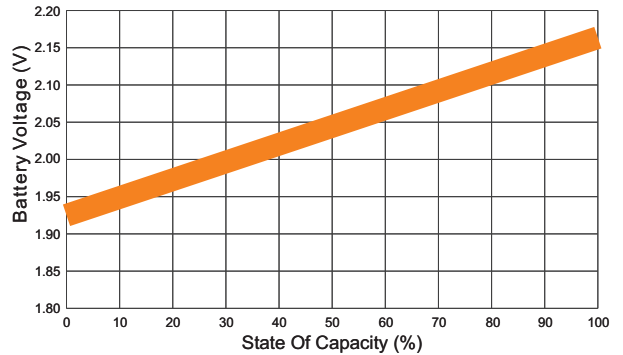

Effect Of Temperature On Long Term Life

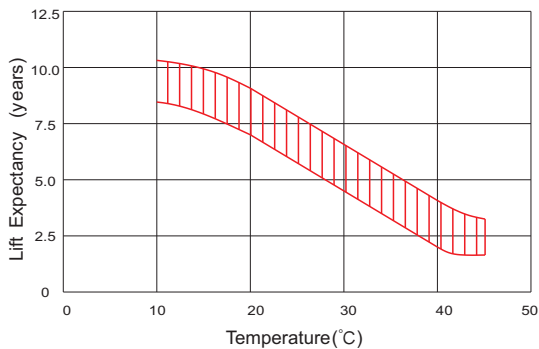

Life Characteristics Of Standby Use

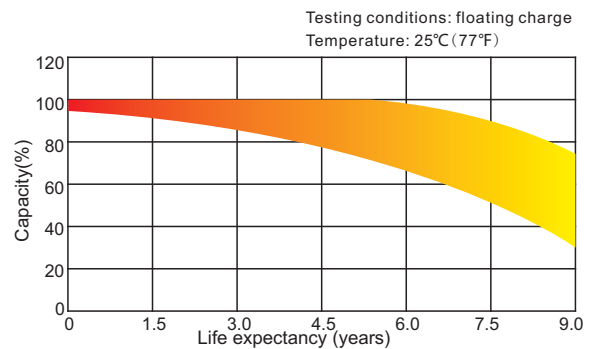

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.